



IP-7000H-TX

1G 4K AV over IP HDMI Transmitter with USB & PoE




This unit is part of a 4K UHD Multi-Function Extension system that allows you to extend an HDMI signal along with KVM using the TCP/IP protocol over regular Cat.5e/6/7 network cable. This extender supports the transmission of Ultra High-Definition signals (up to 4K@30Hz YUV 4:4:4 or 4K@60Hz YUV 4:2:0) with audio and USB up to 100m on a single cable. The transmission distance can be further extended (up to 100m per segment) by using gigabit network switches, It is also possible to have the extension system's Transmitter operate in multi-cast mode, allowing you to send a single AV signal to a large number of Receivers within the same local network. It is useful for user to create large multi-display video walls with amazing simplicity

PANELS



DIAGRAM

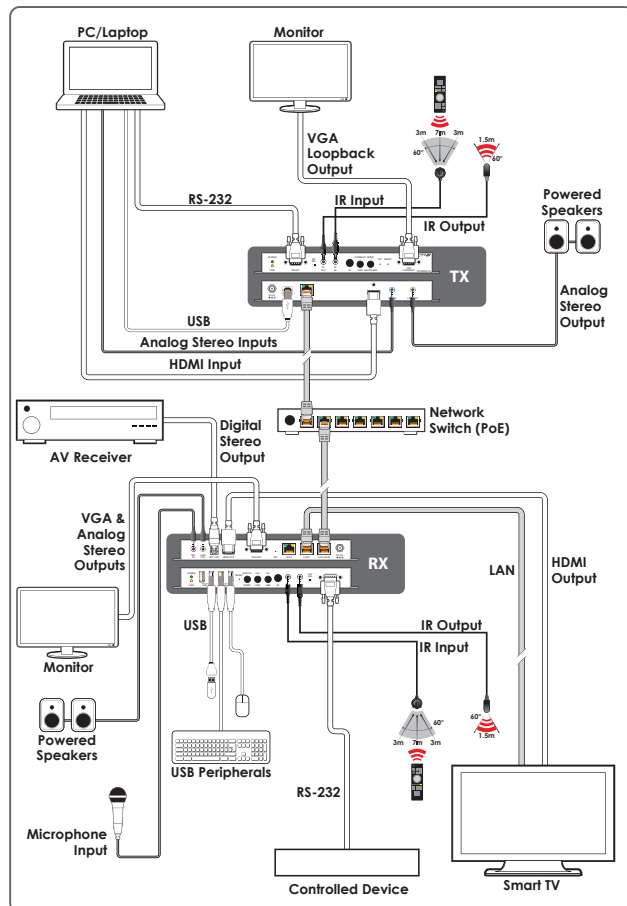

FEATURES

- Video, audio and control transmission over TCP/IP in Uni-cast (point-to-point) or Multi-cast (single-to-many) modes
- Support with 0°, 180°, 270° increments rotation
- The analogue Line In on the Transmitter sends audio directly to the analogue Line Out and is inserted into the HDMI output on connected Receivers
- The Mic In on the Receiver sends audio directly to the analogue Line Out on the Transmitter
- Both Tx and Rx may powered directly by PoE when connected to a Gigabit Ethernet switch that provides PoE (802.3af)
- Supports USB keyboard, mouse and storage extension and IR, RS-232 bypass
- Unit can be controlled via WebGUI, Telnet, and front panel controls

SPECIFICATIONS

Interfaces

Input Port	1 HDMI (Type-A)
	1 Unbalanced Stereo (3.5mm)
Output Port	1 Cat.5e/6/7 (RJ45)
	1 Unbalanced Stereo (3.5mm)
	1 VGA
Control I/O	1 USB Type-B
	1 IR Extender [3.5mm]
	1 IR Blaster [3.5mm]
	1 RS232

Video

HDMI Compliance	2.0 (DVI 1.0)
HDCP Compliance	2.2
Input Signal Types	4K@60 8-bit YUV 4:2:0
Output Signal Types	4K@60 8-bit YUV 4:2:0

Resolutions

Maximum Input	HDMI	4096×2160p@60
Maximum Output	Cat.5e/6/7	4096×2160p@60
	VGA	1920×1200p@60RB

Audio

Input Signal Types	HDMI, Unbalanced Stereo
Output Signal Types	Unbalanced Stereo
Digital Formats	HDMI 2CH LPCM, 8CH LPCM, Standard Bitstream

Power

Power Supply	5V/2.6A
Power Consumption	7.15W (Full load)

Enclosure

Chassis Material	Metal (Steel)
Chassis Colour	Black
Dimensions (W×H×D)	231.5mm×25mm×108mm [Case Only]
	231.5mm×25mm×120mm [All Inclusive]

Weight	660g
--------	------

Field Firmware Update

WebGUI

ORDERING INFORMATION

Model No.	Product Description
IP-7000H-TX	HDMI over IP Transmitter with USB/KVM Extension
IP-CS7	IP Master Controller
ADP-0274AEJ210C	Switching Power Supply 5VDC/2.6A
CBL-E3.5IF-20A	3.50IR cable(Blaster) 2725×28 L:200cm
CBL-IR10C3SA200	3.50IR cable L:200cm 30-50KHz
IP-7000RX	HDMI/VGA over IP Receiver with USB/KVM Extension